

INVERTER

WALL MOUNTED

Model : ASAG09LLTB-V / ASAG12LLTA-V / ASAG09JLTB-V / ASAG12JLTB-V



Wireless R.C.





AOAG09LLTB-V
AOAG12LLTA-V
AOAG09/12JLTB-V

(12)



High Efficient Compact Design

Compact design is realized by high density multi-path heat exchanger.

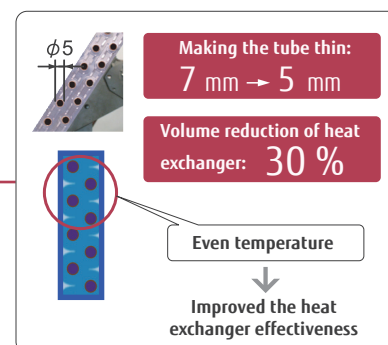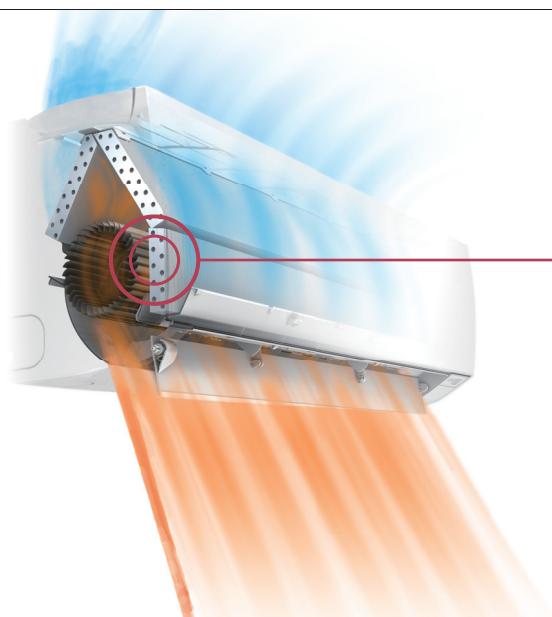

Specifications


Model No.	Indoor unit		ASAG09LLTB-V	ASAG12LLTA-V	ASAG09JLTB-V	ASAG12JLTB-V
	Outdoor unit		AOAG09LLTB-V	AOAG12LLTA-V	AOAG09JLTB-V	AOAG12JLTB-V
Power Source		V/ Ø/Hz	220/1/50	220/1/50	220/1/50	220/1/50
Capacity	Cooling (Min-Max)	kW	2.50(0.9-3.0)	3.40(0.9-3.8)	2.50(0.9-3.0)	3.40(0.9-3.8)
		BTU/h	8,500(3,070-10,230)	11,600(3,070-12,960)	8,500(3,070-10,230)	11,600(3,070-12,960)
	Heating (Min-Max)	kW	3.00(0.9-3.8)	4.00(0.9-5.0)	—	—
		BTU/h	10,200(3,070-12,960)	13,600(3,070-17,060)	—	—
Input Power	Cooling/Heating	kW	0.72/0.74	1.10/1.13	0.72/—	1.06/—
EER	Cooling	—	3.47	3.21	3.47	3.21
COP	Heating	W/W	4.05	3.54	—	—
Running Current	Cooling/Heating	A	3.6/3.6	5.3/5.5	3.6/—	5.3/—
Moisture Removal		l/h	1.3	1.8	1.3	1.8
Sound Pressure Level (Cooling/Heating)	Indoor (High)	dB(A)	43/43	43/43	43/—	43/—
	Outdoor		47/48	50/51	47/—	50/—
Airflow Rate (High) (Cooling/Heating)	Indoor	m³/h	720/740	720/740	720/—	720/—
	Outdoor		1,670/1,470	1,830/1,600	1,670/—	1,830/—
Net Dimension H×W×D	Indoor	mm	262x820x206	262x820x206	262x820x206	262x820x206
		kg (lbs)	7.0 (15)	7.0 (15)	7.0 (15)	7.0 (15)
Net Weight	Outdoor	mm	540x660x290	540x660x290	540x660x290	540x660x290
		kg (lbs)	25.0 (55)	28.0 (62)	25.0 (55)	28.0 (62)
Piping Connections (Small / Large)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52
Drain Pipe Diameter (I.D./O.D.)			11.8/15.0 to 16.8	11.8/15.0 to 16.8	11.8/15.0 to 16.8	11.8/15.0 to 16.8
Max Pipe Length (Pre-Charge)			20(15)	20(15)	20(15)	20(15)
Max Height Difference			15	15	15	15
Operation Range	Cooling	°CDB	18 to 46	18 to 46	18 to 46	18 to 46
	Heating		-15 to 24	-15 to 24	—	—
Refrigerant			R410A	R410A	R410A	R410A

For Vietnam

Powerful operation

Reach the setting temperature quickly.

Ex. : Cooling operation

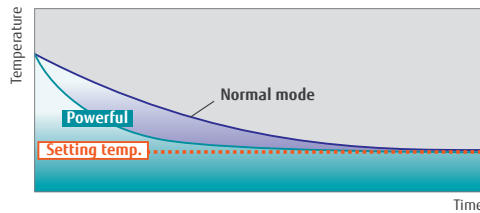


More Convenient Timer


You can set an integrated ON-OFF or OFF-ON timer suitable for your life style.

(Setting time: 0.5, 1, 1.5, 2, 2.5, -----9.5, 10, 11, 12 hours)

From wake up to go to work



From sleep to wake up



Super Quiet Operation

Top class low noise operation by new airflow construction.
Our quiet operation makes the more comfortable environment in a bed room and a study room, etc.

Fan speed
Quiet

Noise level
22 dB(A)

Easy maintenance


Removable & washable



Economy operation

Setting temp. is shifted by 1°C automatically.

Ex. : Cooling operation

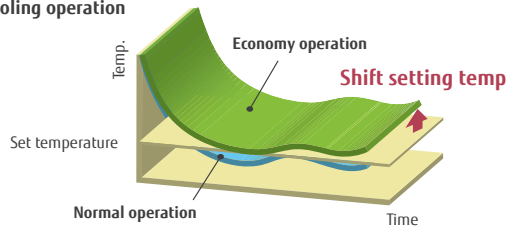

Optional parts

Remote Controller Holder Kit: UTZ-RXLA

Dimensions

Models: ASAG09LLTB-V / ASAG12LLTA-V / ASAG09JLTB-V / ASAG12JLTB-V

(Unit : mm)

